



Valves and Fittings Supplies

1" - 4"


2 pc Flange Ball Valve, Full Bore, ANSI/TE/TD, with ISO 5211G

SP2PDMANSI/TE/TD

- I Investment Casting Body and Cap
- I Flange Ends: ASME B16.5
- I Face To Face: ANSI 16.10
- I Pressure Rating: ANSI/TE/TD Class 150
- I Material: CF8M, CF8, CF3M, WCB
- I Mounting Pad: ISO 5211
- I Pressure Test: API 598



Item	Part	Material		
1	□□	A216-WCB	A351-CF8	A351-CF8M
2	□□	A216-WCB	A351-CF8	A351-CF8M
3	□	304	304	316
4	□□	PTFE		
5	□□	304	304	316
6	□□□□	PTFE		
7	○□□	VITON		
8	□□	PTFE		
9	□□	304		
10	□□□□	301		
11	□□	304		
12	□□□□	304		
13	□□□	304		
14	□□	304		
15	□□□	Plastic		
16	□□□	304		
17	□□□□	PTFE		
18	□□□□□	304		

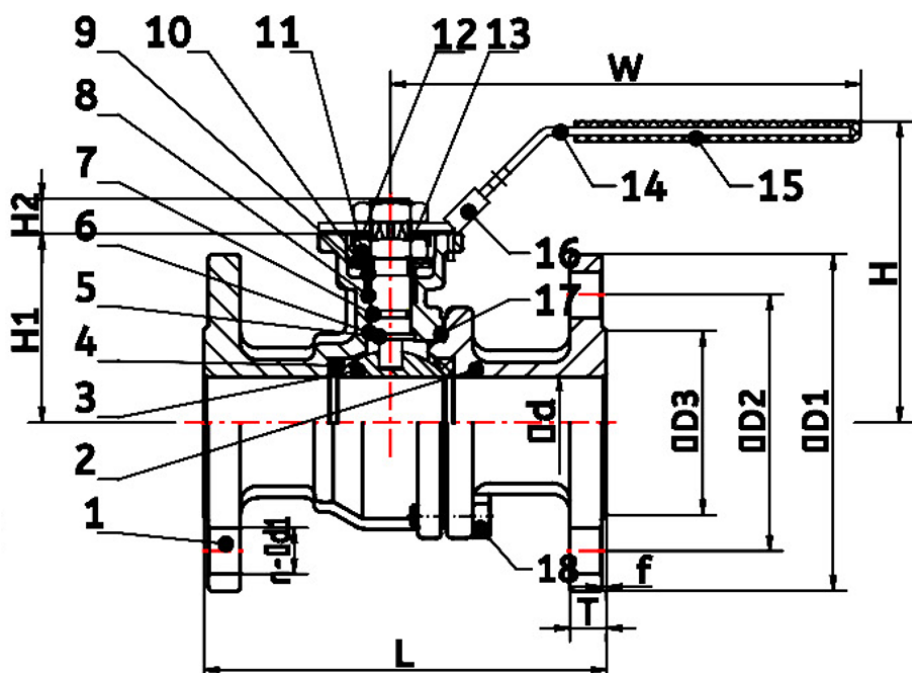

SIZE	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"
Dd	15	20	25	32	38	50	65	76	94
L	108	117	127	140	165	178	190	208	229
T	9.7	10.5	11.2	12.7	14.7	16.3	17.9	19.5	24.3
f	1.6	1.6	1.6	1.6	2	2	2	2	2
D1	89	98.0	108	117	127	152	178	190	229
D2	60.5	70	79.2	88.9	98.4	120.7	139.7	152.4	190.5
D3	35	43	51	63.5	73.2	92	104.7	127	157.2
n	4	4	4	4	4	4	4	4	8
Dd1	16	16	16	16	16	19	19	19	19
H1	48.3	53	58.5	71	76	84.5	101.5	111.5	141
H2	9	9	11	11	14	14	17	17	22
H	80	85	95	108	114	124	148	158	191
W	140	140	160	160	185	185	230	230	230
K	M12*1.5	M12*1.5	M14*1.5	M14*1.5	M18*1.5	M18*1.5	M22*1.5	M22*1.5	M22*1.5
P	9	9	11	11	14	14	17	17	17
A1	3	3	3	3	3.5	3.5	4.5	4.5	4.5
A2	3	3	3.5	3.5	4.5	4.5	5.5	5.5	5.5
B1	36	36	42	42	50	50	70	70	70
B2	42	42	50	50	70	70	102	102	102